

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 079 579 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
28.02.2001 Bulletin 2001/09

(51) Int. Cl.<sup>7</sup>: H04L 27/26

(21) Application number: 00307047.1

(22) Date of filing: 17.08.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
◦ Duncan, Steven Howard  
Newton Abbot, Devon TQ12 5BZ (GB)  
◦ Heaton, Robert Barnard  
Ash Green, Nr. Aldershot GU12 6HR (GB)

(30) Priority: 27.08.1999 GB 9920446

(74) Representative:  
Burke, Steven David et al  
R.G.C. Jenkins & Co.  
26 Caxton Street  
London SW1H 0RJ (GB)


(71) Applicant:  
Mitsubishi Electric Information Technology  
Centre Europe B.V.  
Guildford, Surrey GU2 5YD (GB)

(54) OFDM frame synchronisation

(57) FFT demodulation of OFDM symbols is achieved using a frame synchronisation pulse generated by deriving absolute values of successive complex samples of the OFDM symbol, determining the difference between such values and other values separated therefrom by a period representing the useful part of the

OFDM symbol, integrating the difference values over a plurality of symbols and determining the sample position representing the point at which the integrated difference values substantially change.

FIG. 3

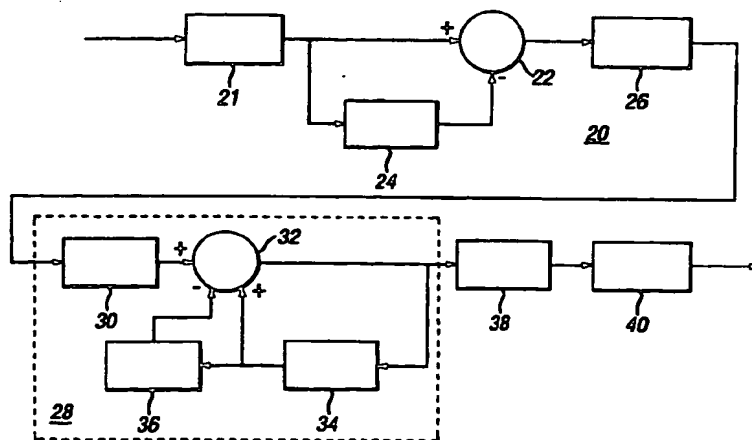

EP 1 079 579 A1

## Description

[0001] This invention relates to OFDM modulation. It is particularly concerned with the generation of a synchronisation pulse representing an OFDM symbol boundary, for example for use in Fourier Transform demodulation.

[0002] OFDM systems are well known. Various techniques have been used for synchronisation of OFDM receivers. Some of these techniques require transmission of a special synchronisation signal. Other techniques rely on a standard OFDM signal, in which a complete symbol comprises a "useful part" and a "guard space", the guard space sometimes being referred to as a guard interval, cyclic extension or cyclic prefix.

[0003] The guard space precedes the useful part of the symbol and contains a repeat of the data at the end of the useful part. (This is equivalent to having a guard space after the useful part, containing data which is the same as that at the beginning of the useful part.)

[0004] Synchronisation techniques which rely upon the duplicated data in the guard space generally operate by performing a cross correlation between complex samples spaced apart by the length of the useful part of the symbol. This generates a timing pulse which is used in Fourier Transformation of the received signal. The timing of the pulse is such that the Fourier Transform window contains only data from a single symbol.

[0005] If the timing is incorrect, inter-symbol-interference (ISI) occurs. However, the use of the guard space allows a certain amount of variation in the timing of the pulse while still avoiding ISI. The guard space should be longer than the longest expected spread of delays amongst signals received via different paths. The guard space is relatively small compared with the useful part of the signal; typically, the guard space may contain  $N_u/32$ ,  $N_u/16$ ,  $N_u/8$  or  $N_u/4$  samples, where  $N_u$  is the number of samples in the useful part of the symbol.

[0006] It would be desirable to provide a simpler and less expensive technique for synchronisation, and preferably one which can produce more accurate results.

[0007] Aspects of the present invention are set out in the accompanying claims.

[0008] According to a further aspect, a synchronisation pulse for a Fourier Transform demodulator is generated by taking absolute values of complex samples of an OFDM symbol, determining the difference between absolute values which are separated by the length of the useful part of the signal, and generating the synchronisation pulse in response to determining the time at which there is a substantial increase in the difference value.

[0009] The invention also extends to apparatus for generating such a synchronisation pulse, and to a method and an apparatus for receiving an OFDM signal using such techniques.

[0010] Using the method of the invention, the difference between the absolute values of the complex values will be very small when those complex values are equal. Thus, this difference will remain small whenever the samples in a guard space are subtracted from the corresponding values within the useful part of the symbol. When the values cease to be small, this represents the end of the symbol, and this point can be used to allow an FFT demodulator window to be aligned with the OFDM symbol. The point can be detected using a filter, preferably a median filter.

[0011] It is found that, for example because of slight drift in the local oscillator, the complex samples of an OFDM signal can suffer different phase rotations within the period of a single symbol. Thus, although nominally the data in a guard space should correspond to part of the data in the useful part of the symbol, the actual complex values derived from the signal may differ because of this phase rotation. However, by taking the absolute values of the complex samples, such differences are reduced substantially. Furthermore, because the system handles real, rather than complex, values, data storage requirements are reduced. The complexities and inaccuracies associated with multipliers can also be avoided. The arrangement can also produce better accuracy than those systems which rely on integrating the output of a cross-correlator, and better acquisition times than prior art systems relying on phase locked loops (PLL's).

[0012] Preferably, the difference values, are integrated over a number of symbols. Preferably this is achieved using an infinite impulse response (IIR) filter.

[0013] An arrangement embodying the arrangement will now be described by way of example with reference to the accompanying drawings, in which:

Figure 1 is a block diagram of an OFDM receiver;

Figure 2 represents an OFDM signal;

Figure 3 schematically illustrates the processing carried out in a Fourier Transform synchroniser circuit of a receiver according to the present invention; Figure 4 shows a typical trace of an absolute difference signal arising in the synchronising circuit of Figure 3; and

Figure 5 is a typical output from a rising edge detector of the synchronising circuit.

[0014] Referring to Figure 1, an OFDM receiver 2 comprises an antenna 4 which receives a signal and presents it to a down-converter 6 which converts the RF signal to an IF signal. This is then converted into a baseband signal by an IF-to-baseband converter 8. This produces at its output complex samples of each transmitted OFDM symbol. These complex samples are digitised by an analog-to-digital (A/D) converter 10, and delivered to a Fast Fourier Transform (FFT) circuit 14. The FFT circuit 14 converts the samples from the time domain to the frequency domain, and the symbol data

at the output is provided to a channel estimator and corrector 16 and a decoder 17. If desired, the complex samples from the A/D converter 10 and/or a signal from the channel estimator and corrector 16 may also be delivered to a frequency synchronisation circuit 18, which is used to control the local oscillator frequencies used by the down converter 6 and the IF-to-baseband converter 8; however, it is also possible to implement the receiver without requiring such feedback.

[0015] The complex samples are also delivered to a symbol synchronisation circuit 20, which generates a synchronisation pulse for use by the Fast Fourier Transform (FFT) circuit 14. The FFT circuit 14 requires the synchronisation pulse so that each transformation operation is aligned with the start of the OFDM symbol.

[0016] The circuit described so far is known from the prior art. The present invention is directed to a novel and inventive technique for use in the symbol synchronisation circuit 20.

[0017] Referring to Figure 2, it is assumed that an OFDM symbol consists of  $N_u + N_g$  samples, representing  $N_u$  samples in the useful part U of the signal, preceded by  $N_g$  samples in the guard space G. The  $N_g$  samples in the guard space G contain the same data as the last  $N_g$  samples of the useful part U of the symbol (as indicated, in respect of one of the symbols, by hatching).

[0018] Figure 3 is a schematic block diagram representing the functions performed by the circuit 20.

[0019] The complex samples from the IF-to-baseband converter 8 are converted into absolute values by an absolute value converter 21. These output values are delivered to a subtractor 22 and to delay circuit 24, which delays the values by an amount corresponding to the length of the useful part U of the OFDM symbol. Accordingly, the delay circuit 24 delays the absolute values by a period corresponding to  $N_u$  samples. The subtractor 22 subtracts the delayed absolute values from the non-delayed values received from the absolute value converter 21. In practice, the absolute values of the real and imaginary parts of the complex samples are summed before being delivered to the subtractor 22. Similarly, either the absolute values of the real and imaginary parts are summed before being delivered to the delay circuit 24, or they are delivered to respective delay circuits whose outputs are summed before presentation to the subtractor 22.)

[0020] The resultant difference value is from subtractor 22 converted into an absolute value by a second absolute value converter 26. The output of the absolute value converter 26 will therefore be substantially zero during the period that the last  $N_g$  samples contained in the useful part U are present at the input of the absolute value converter 21, because at this time the subtractor will be receiving those samples at its positive input and, at its negative input, samples of equal value derived from the guard space G. At other times, the output of the absolute value converter 26 would adopt values deter-

mined by the correlation, if any, between data in successive symbols, but in practice this would be essentially random.

[0021] The output of the absolute value converter 26 will therefore comprise successive absolute difference values, each associated with a respective sample of the OFDM symbol. These difference values are then passed to an integrating circuit 28, which serves to integrate each absolute difference value over a number of symbols.

[0022] This is achieved by multiplying each difference value by a factor  $G_1$  in a multiplier 30, the output of which is delivered to a positive input of a summing circuit 32. The output of the summing circuit is sent to a delay circuit formed by a first-in, first-out (FIFO) memory 34 which serves to delay each of its input signals by a period corresponding to an entire OFDM symbol, i.e.  $N_u + N_g$  samples. The output of the delay circuit 34 is delivered to a positive input of the summer 32, and also to a further multiplying circuit 36 which multiplies the output by  $G_2$ . The resultant of this is sent to a negative input of the summer 32.

[0023] As a consequence of this arrangement, the output of the summer comprises successive samples  $S(n, m)$ , where  $n$  represents the number of the sample within the OFDM symbol and  $m$  represents the symbol, and wherein:

$$S(n, m) = G_1 (V(n, m)) + (1 - G_2) S(n, m - 1)$$

and wherein  $V(n, m)$  represents the absolute value for the sample position  $n$  of symbol  $m$ .

[0024] A typical output of the integrating circuit 28 is shown in Figure 4. It will be noted that there are spaced periods in which the output is substantially zero, corresponding to the periods in which the last  $N_g$  symbols of the useful part U are present at the input of the absolute value converter 21. These periods are separated by intervals in which there is a substantial amount of random data. The distinction between the two types of intervals is enhanced by integration over a number of symbol periods.

[0025] In a first embodiment, the output of the summing circuit 32 is delivered to a rising edge detector 38, a typical output of which is shown in Figure 5. This output is delivered to a peak detector 40, which detects the trailing edge of each of the periods corresponding to the presence of the guard interval at the output of the delay circuit 34. The peak detector 40 outputs a logic high signal precisely once per OFDM frame, which is used as the sync pulse denoting the end of the OFDM symbol FFT window.

[0026] In a preferred aspect of this embodiment, the delay circuit 34 comprises a plurality of memory elements or registers arranged in a FIFO array. Instead of taking the output of summer 32 for processing in real time, the contents of the registers in the delay circuit 34 can be processed to determine the register (and hence

the sample) corresponding to the end of the OFDM symbol.

**[0027]** Whichever arrangement is used, the edge detection and peak detection can be achieved using either hardware or software. The rising edge detector 38 may be implemented by a FIR filter, which may have variable coefficients which are altered following switch on or re-tuning to speed up the locking on to the signal. For example, the FIR filter may be arranged to subtract from the value of the latest sample the values of the preceding  $n$  samples. This will give a significant positive value only at the end of the symbol, when the difference between the absolute values ceases to be zero. The value  $n$  may be altered not only when acquiring a signal, but also in dependence on, for example, the risk of multi-path interference; when there is significant multi-path interference, there will be noise in the initial part of the period where the difference between the absolute values ought ideally to be zero, so a smaller value for  $n$  would be appropriate.

**[0028]** In an alternative embodiment, the rising edge detector 38 is replaced by a median filter followed by a step detector.

**[0029]** The median filter simply replaces a block of samples by the median or middle value in the block.

**[0030]** The median filter is preferably implemented in the following manner. A block of memory stores the last ' $N$ ' samples received. Each new sample is added to this memory at the expense of the oldest sample, which falls out of the window or block. The entire population then needs to be sorted which could be achieved using a 'bubble sort'. Preferably the memory stores not just the value of the sample but also a value representing its age. When a new sample is received, the oldest currently stored sample is removed. The space released is used to allow the remaining samples to be shifted up or down one place in a manner that allows the new sample to be inserted into its correct place in the numerical order. In this way the population of samples is stored in numerical order at all times. The median is then simply the value in the middle of the list. Other sorting methods may be used to improve efficiency, of course.

**[0031]** A median filter has the benefit that, in addition to removing noise, the edge (i.e. the time of occurrence of the boundary between the high and low values output by the integrating circuit 28) is preserved.

**[0032]** The median filter output is then delivered to the step detector, which may operate by deriving output samples  $O_n$  (where  $n$  = the sample number) from input samples  $I_n$  using:

$$\sum_{k=0}^i I_{(n-k)} - \sum_{k=i+1}^j I_{(n-k)}$$

**[0033]** The sigma functions determine the range of samples over which the edge is detected. Typical values

for  $i$  and  $j$  are 3 and 7, respectively. The step detector produces at its output a sharp spike corresponding to the end of a symbol. The peak detector 40 then detects this spike to provide an accurate pulse for the FFT circuit 14.

**[0034]** The invention has been described in the context of an OFDM receiver, in which the synchronisation pulse is used to define the window of samples on which a Fast Fourier Transformation is performed. However, the invention is also useful in other circumstances in which there is a need for a synchronisation pulse representing the symbol boundaries; for example, such a pulse would be valuable in a repeater where full FFT demodulation is not performed.

**[0035]** The functional elements described herein can be implemented either in dedicated hardware or in software.

#### Claims

1. A method of generating a synchronisation pulse representing a symbol boundary in an OFDM signal comprising useful symbol periods separated by guard spaces, with data in each guard space corresponding to part of the data in a respective useful period, the method comprising the step of deriving the difference between absolute values of samples of the OFDM signal separated by a period corresponding to the useful symbol period, and generating the synchronisation pulse in response to a substantial change in the difference values.
2. A method as claimed in claim 1, wherein the difference values represent integrated values obtained over a plurality of symbol periods.
3. A method as claimed in claim 2, wherein an infinite impulse response filter is used for producing the integrated values.
4. A method as claimed in any preceding claim, including an edge detector for detecting substantial changes in the difference values.
5. A method as claimed in claim 4, wherein the edge detector comprises a filter.
6. A method as claimed in claim 5, wherein the edge detector comprises a median filter.
7. A method as claimed in claim 5, wherein the filter has variable coefficient.
8. A method as claimed in claim 5 or claim 7, wherein the filter is a finite impulse response filter.
9. Apparatus for generating a synchronisation pulse, the apparatus being arranged to operate in accord-

ance with a method of any preceding claim.

10. A method of receiving an OFDM signal comprising demodulating the signal in order to produce complex samples of transmitted OFDM symbols, and applying a Fourier Transform to the complex samples, the method further including the step of synchronising the Fourier Transform window with the OFDM symbols using a synchronisation pulse generated by a method according to any one of claims 1 to 7.

11. An OFDM receiver arranged to operate in accordance with the method of claim 10.

15

20

25

30

35

40

45

50

55

FIG. 1

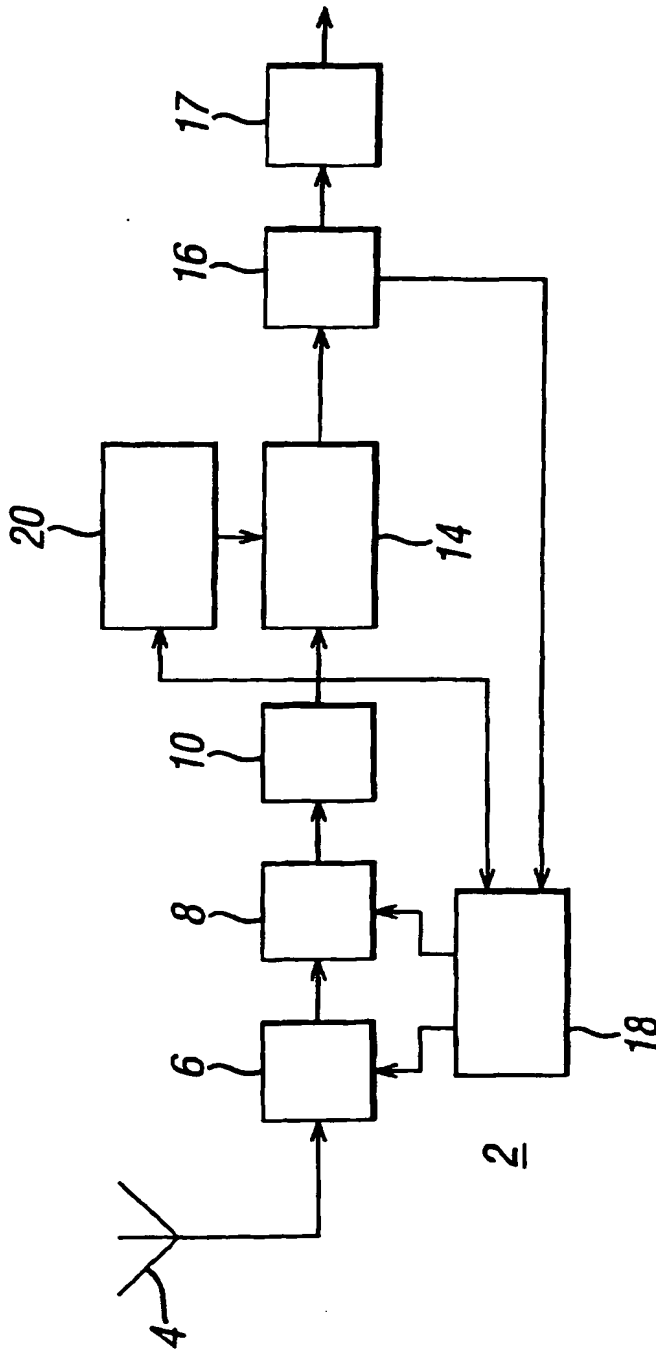


FIG. 2

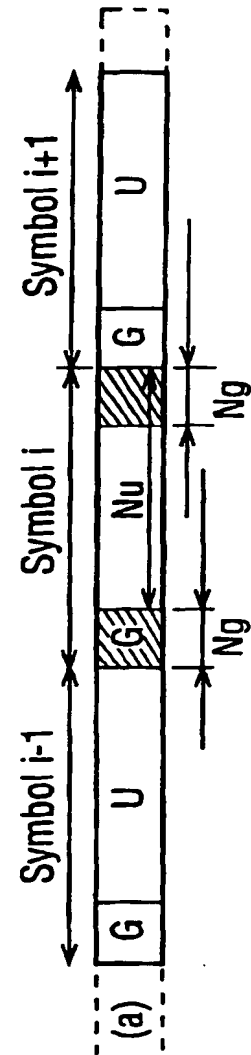


FIG. 3

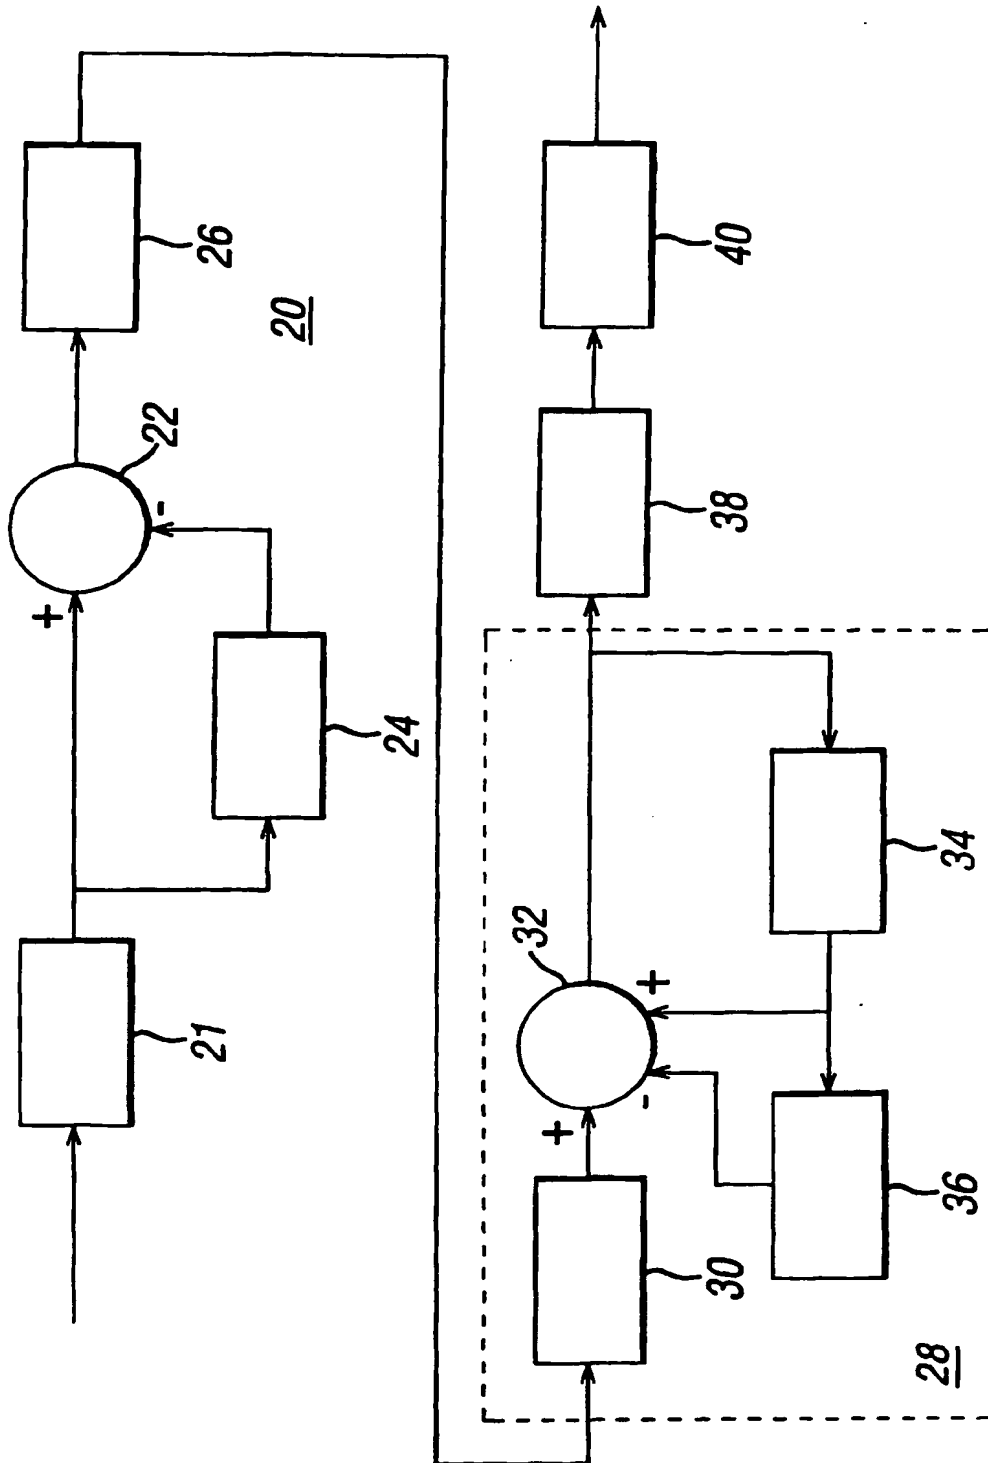


FIG. 4


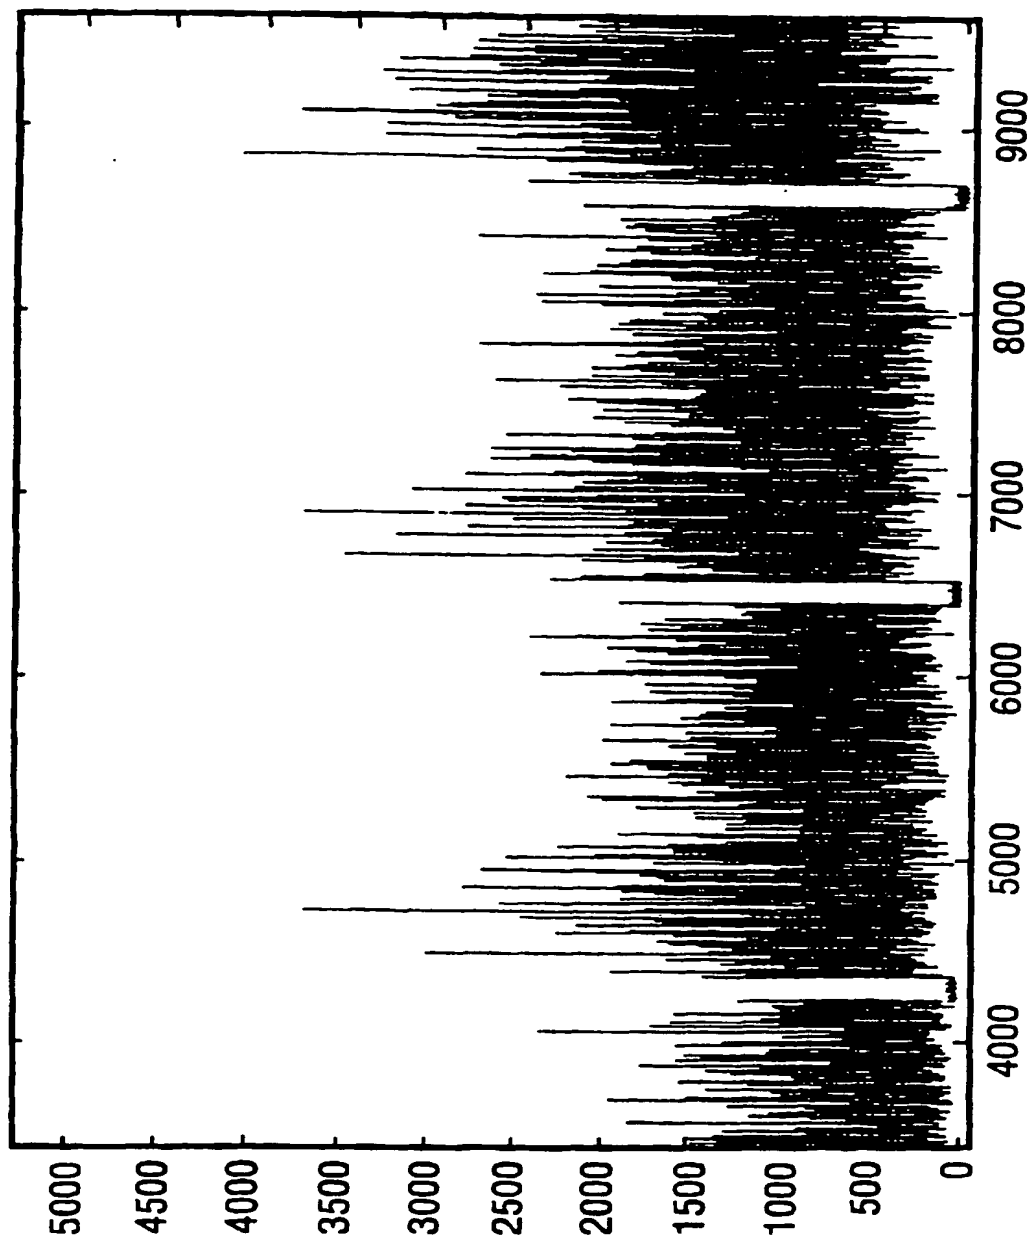




FIG. 5



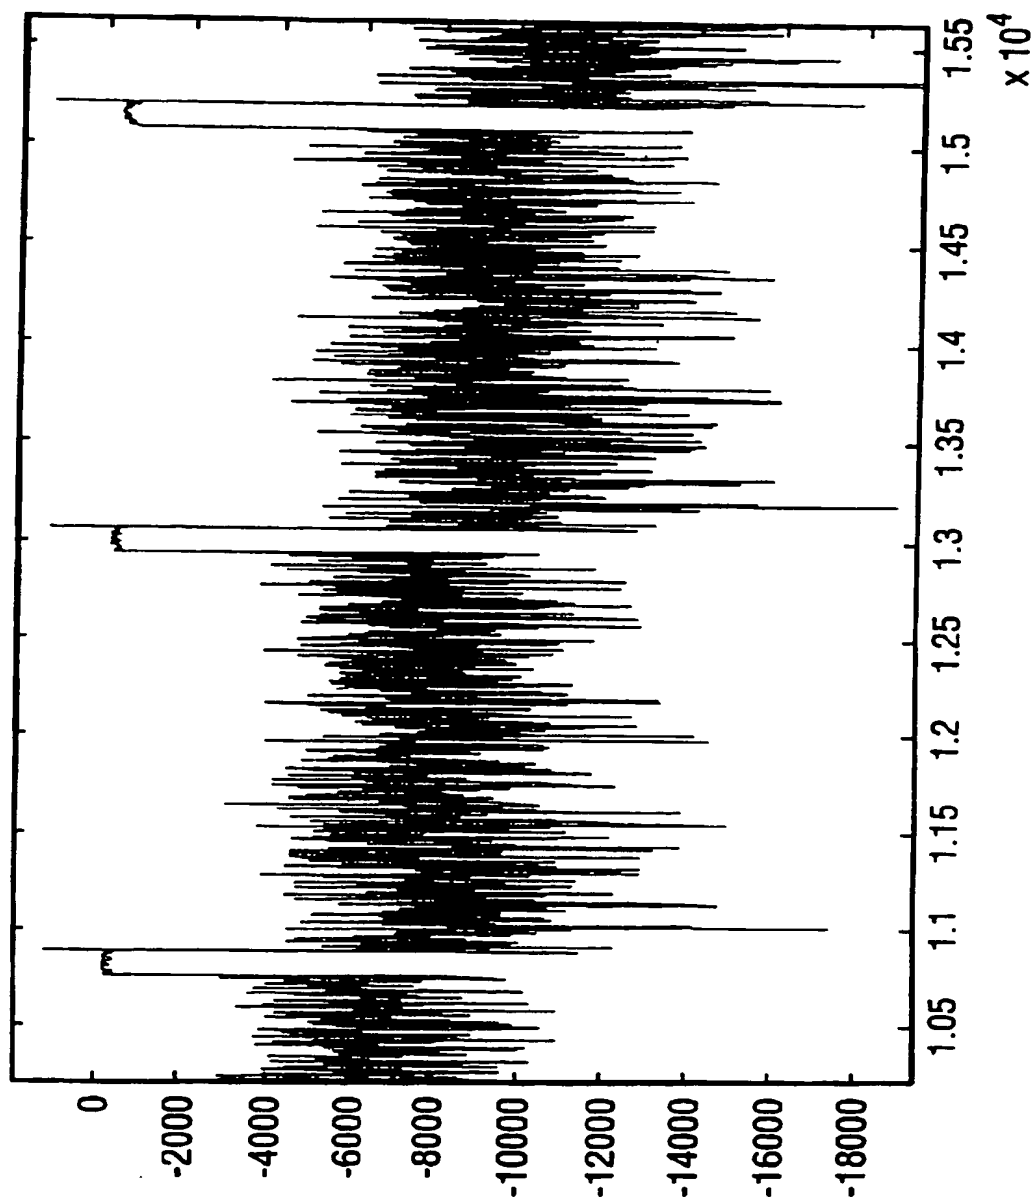

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 30 7047

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 798 903 A (ADVANCED DIGITAL TELEVISION BR ;MATSUSHITA ELECTRIC IND CO LTD (JP) 1 October 1997 (1997-10-01) * abstract; claim 9 * * page 5, line 29 - line 32 * * page 5, line 44 - line 47 * * page 6, line 45 - line 48 * * page 6, line 58 - page 7, line 1 * * page 9, line 35 - line 45 * * page 10, line 22 - line 28 *	1-11	H04L27/26
A	EP 0 772 332 A (BRITISH BROADCASTING CORP) 7 May 1997 (1997-05-07) * abstract * * page 5, line 48 - page 6, line 1 * * page 6, line 17 - line 23 * * page 8, line 35 - line 45 *	1-11	
A	EP 0 656 706 A (TOKYO SHIBAURA ELECTRIC CO) 7 June 1995 (1995-06-07) * abstract; claim 2; figure 2 * * column 2, line 14 - line 46 *	1-3,10, 11	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
A	US 5 764 706 A (DAPPER MARK J ET AL) 9 June 1998 (1998-06-09) * abstract * * column 5, line 47 - column 6, line 12 * * column 7, line 11 - line 33 *	1-5,9-11	H04L
The present search report has been drawn up for all claims			
Place of search <b>BERLIN</b>		Date of completion of the search <b>3 November 2000</b>	Examiner <b>Binger, B</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons B : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 7047

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

03-11-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0798903 A	01-10-1997	JP 2774961 B	09-07-1998
		JP 9321733 A	12-12-1997
EP 0772332 A	07-05-1997	GB 2307155 A,B	14-05-1997
EP 0656706 A	07-06-1995	JP 3041175 B	15-05-2000
		JP 7143096 A	02-06-1995
		CA 2135730 A	13-05-1995
		KR 136718 B	01-06-1998
		US 5608764 A	04-03-1997
US 5764706 A	09-06-1998	AU 6854096 A	19-03-1997
		BR 9612626 A	29-06-1999
		EP 0956675 A	17-11-1999
		JP 2000504508 T	11-04-2000
		WO 9708866 A	06-03-1997

EPO FORM P459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82